

stop the pinch..

Engineered to
rid the pinch
with DN40
and DN50
copper press
fittings using
concentric
press collar
technology.



**Made In
Germany**
Manufactured
& Engineered
for Australia



Snap-On DN50
Copper Collar



Compared to the jaw equivalent:

smaller

DN50 collar is **50% smaller**
for tight or constrictive installs.


lighter

DN50 collar is **60% lighter**
for easier installation.

tested

Collars have passed all common
fitting tests up to 2500 kPa.

> More information available on our website.

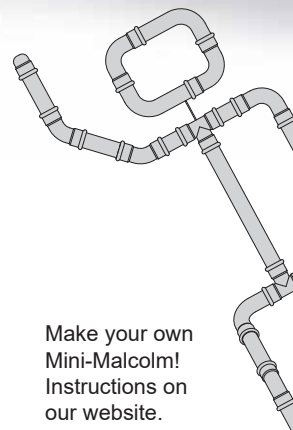


Make your own
Mini-Malcolm!
Instructions on
our website.

Supplied with Experience

auspress.com.au





AusPress®
Press-Fit & Tool Solutions

Copper Press Jaw & Collar Compatibility Chart

Available from:

AusPress Systems


Freecall: 1300 287 773

P: (08) 8374 3426

E: sales@auspress.com.au

Also available at selected local plumbing store distributors Australia wide.

extend your toolbox...



Copper Press-Fit



24kN
press force

32kN
press force

Install Copper

Copper Press-Fit up to DN100

Made in Germany

Manufactured & Engineered for Australia

Mini Tool Suitable

24kN Press Force

Press Tool Suitable

32kN Press Force

Extend your toolbox with our range of press jaws and collars engineered specifically for Australian diameters DN15 to 100 of copper press-Fit.

Sold individually or in 'sets' as shown in the table:

24kN
press force

Press Tools rated to 24kN:


- Vetec SPM24
- Viega Pressgun Picco 3 & 4*
- Novopress ACO152*

* Please note the tool type when ordering.

32kN
press force

Press Tools rated to 32kN:

- Novopress AFP202
- Novopress ACO202
- Novopress ACO203
- Novopress ACO202-XL
- Novopress ACO203-XL
- Vetec SPM32
- Vetec CPN700
- R'berger Romax 3000
- R'berger Romax 4000
- Viega Pressgun 4B
- Viega Pressgun 5
- Rems Akku-Press
- Kembla KPL
- Kembla KPLxl
- Milwaukee M18 Force Logic
- Milwaukee M18 Force Logic Long
- Klauke UAP3L
- Klauke UAP4L



Ensure the inner press surfaces are lubricated with Inox for a smooth consistent press.

Reapply as needed.

		Copper Press Jaws: Ordering					
<p>Press Jaws Insert directly into a compatible press tool.</p>							
	Profile Suitability:	M, V & SA	M, V & SA	M, V & SA	M, V & SA	M, V & SA	M, V & SA
<p>32kN press force</p>	Item Product No	VT.PKC.015	VT.PKC.020	VT.PKC.025	VT.PKC.032	MW.PKSA.040	MW.PKSA.050
	Set Product No	TK.PKC.1550J (incl DN15 - 50 Jaws in Case)					
<p>24kN press force</p>	Item Product No	VT.PZC.015	VT.PZC.020	VT.PZC.025	VT.PZC.032	-	-

		Copper Press Collars: Ordering					
<p>Press Collars Use a ZB203 Adaptor Jaw between Press Collar and the 32kN Press Tool.</p>							
	Profile Suitability:	-	M, V & SA	M, V & SA	V	V	V
<p>32kN press force</p>	Item Product No	NP.ZB203	VT.PKC.040C	VT.PKC.050C	NP.PKC.065	NP.PKC.080	NP.PKC.100
	Set Product No	✓	TK.PKC.4050C (incl Adaptor Jaw & Case)		TK.PKC.XLSET (incl Adaptor Jaw & Case)		

Copper Jaws & Collars: Press-Fit Compatibility Table										
Brand	Supplier	DN15	DN20	DN25	DN32	DN40	DN50	DN65	DN80	DN100
B-Press	Reece	✓	✓	✓	✓	✓	✓	✓	✓	✓
AusPress	AusPress	✓	✓	✓	✓	✓	✓	✓	✓	✓
KemPress	Kembla	✓	✓	✓	✓	✓ ‡	✓ ‡	✓	✓	✓
EziPress	Plumbing Plus	✓	✓	✓	✓	✓	✓	✓	✓	✓
Propress	Viega	✓	✓	✓	✓	✓	✓	✓	✓	✓

Not listed? Check with us first!

‡ KemPress 'SA-Profile' jaws or our collars only with KemPress fittings DN40 & DN50.

Please Note: All items sold separately & subject to availability. Warranty does not extend to tool or the system being installed. Installation must follow the manufacturer's recommended & technical instructions for the system and tool. Information supplied as a guide only and may change at anytime without notice.